

# SDE 64

# SIMAG

## 63 kg Self-contained Ice Machine

Complete range: SDE 18 - SDE 24 - SDE 30 - SDE 34 - SDE 40 - SDE 50 - SDE 64 - SDE 84 - SDE 100 - SDE 170 - SDE 220

### Technical features

- Stainless steel bodywork - scotch brite
- Air or water cooled
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system



### Internal bin capacity




20 kg of ice

950 cubes

### Type of ice

Hollow Cubes

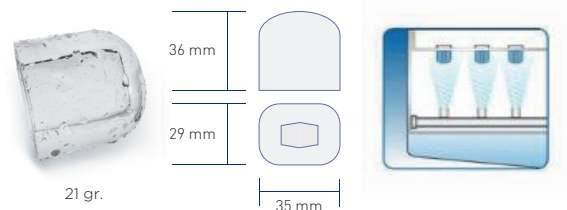

### Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

### Machine dimensions

Net size WxDxH 485 x 575 x 905 mm

Net weight 48 kg

Shipping size WxDxH 550 x 640 x 940 mm

Shipping weight 57 kg

### Technology and Certifications



MILANO OFFICE  
Sales Dept.  
Tel. +39 02 93900215  
e-mail: sales@simag.it  
Service Dept.  
Tel. +39 02 93960357  
e-mail: service@simag.it

SIMAG FAR EAST  
Singapore Office  
Tel. ++65 6738 5393  
e-mail: scotsman@scotsman.com.sg


[www.simag.it](http://www.simag.it)

# SDE 64

# SIMAG

## 63 kg Self-contained Ice Machine

Complete range: SDE 18 - SDE 24 - SDE 30 - SDE 34 - SDE 40 - SDE 50 - SDE 64 - SDE 84 - SDE 100 - SDE 170 - SDE 220

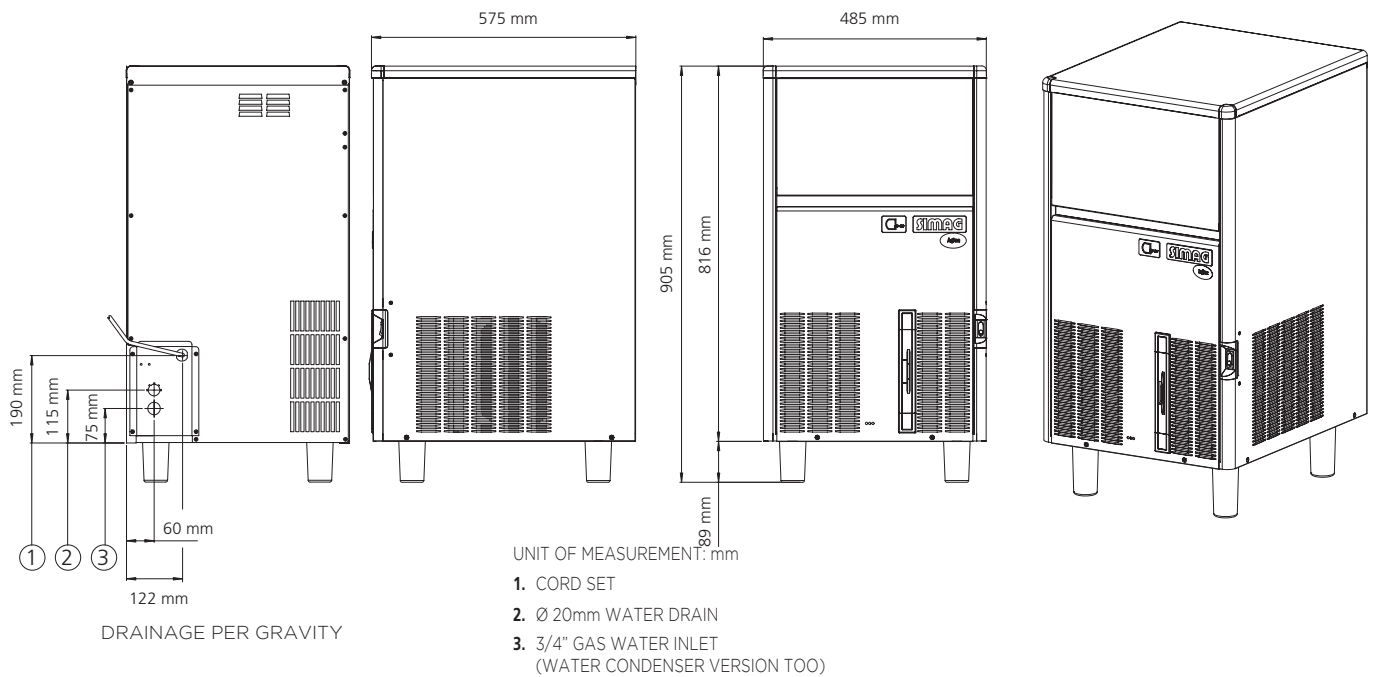

### Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg	Power input Watt (*)	Refrigerant		Fuse A	Consumptions		
		10°C/10°C		Type	Charge kg		kWh/100kg	kWh/24h	Water l/h (**)
SDE 64 A	230/50/1	63	580	R134a	0.37	10	21.4	10.5	5.4
SDE 64 W	230/50/1	60	470	R134a	0.24	10	15.2	8.4	45.0
SDE 64 A	220/60/1	63	580	R134a	0.37	10	24.5	12	5.4
SDE 64 W	220/60/1	60	470	R134a	0.24	10	n.a.	n.a.	45.0

(\*) Power Input: at 43°C Ambient Temperature  
(\*\*) Water Consumption: at 32°C Air and 21°C Water