

SCE 30

XSafe

SIMAG

31 kg Self-contained Ice Machine

Complete range: SCE 20 – SCE 30 – SCE 40 – SCE 50 – SCE 65 – SCE 90 – SCE 105

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



Internal bin capacity



9 kg of ice

430 cubes

Type of ice


Full Cubes



34 mm



30 mm



Machine dimensions

Net size WxDxH	390 x 515 x 640 mm
Net weight	31 kg
Shipping size WxDxH	460 x 580 x 760 mm
Shipping weight	37 kg

Voltage

230/50/1 Standard version

115/60/1 - 220/60/1 Available on demand

Technology and Certifications



MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg

www.simag.it


XSafe



SIMAG

31 kg Self-contained Ice Machine

Complete range: SCE 20 - SCE 30 - SCE 40 - SCE 50 - SCE 65 - SCE 90 - SCE 105

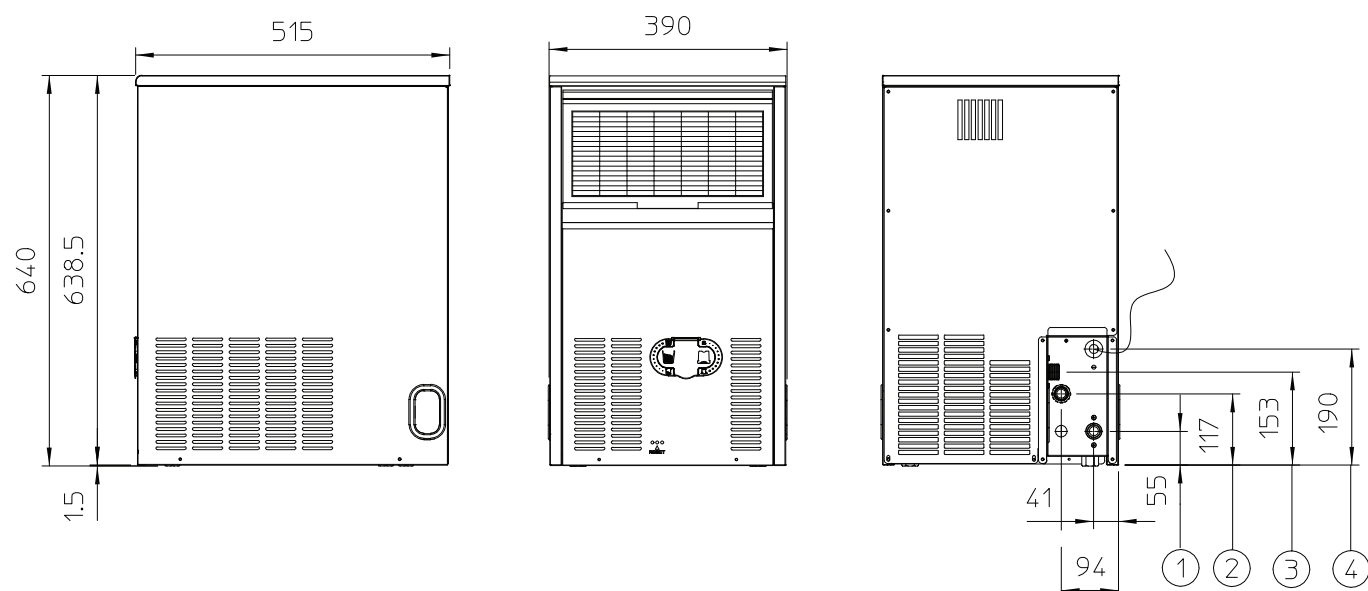

1. 3/4" GAS WATER INLET
WATER COOLED UNIT ONLY
2. 3/16" WATER DRAIN
3. CORD SET
4. 3/4" GAS WATER INLET

DRAINAGE PER GRAVITY

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design
are subject to change without notice

Model	Voltage	Daily production kg	Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C		Type	Charge kg		kWh/100kg	kWh/24h	Water l/h
SCE 30 A	230/50/1	31	430	R134a	0.270	10	n.a.	7	5.0
SCE 30 W	230/50/1	28	350	R134a	0.240	10	63	14.5	33.0

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water